Natural Convection Oven,
Standard type

ON4-10S

ON4-10SW

21 CFR Part 11 FDA Compliance



Airflow

Intuitive Touch Controller

- Intuitive interface with 3.5-inch display
- 'Wait on / Wait off' timer function

3.5-inch touch display



Wait on & Wait off timer

Reliable Temperature Control Performance

- Wide temperature range of up to 250°C
- Temperature accuracy for wide range by 3-point calibration
- The upper and lower temperature limits can be set, enabling alerts for deviations to trigger quick actions
- Uniform temperature distribution through airflow optimized for uniform heat transfer (within ±3.6°C at 100°C)



Accurate temperature control with 3-point calibration



Settings for temperature deviation

Convenient Experiment and Data Checking

- Support RS-232/USB port and software making easy operation and data management from PC (option)
- Monitor via mobile app anytime, anywhere with LC Connected. (Requires LC GreenBox, option)
- Monitor the temperature on BMS (Building Management System) for quick responses to abnormalities. (option)
- Integrated with 21 CFR Part 11 compliant LC DataKeeper, suitable for GMP audits (option)



Manipulation via PC (option)

Real-time monitoring via mobile devices (LC GreenBox: option)

Ensuring User Safety

- Effectively removes fumes from the inside of the chamber via the top vent hole (ON4-03)
- Safe surface even when operating at max temperatures (less than 70°C at 250°C)
- Implemented with the top-rated overheating prevention system (Patented in Korea)
- Over Temperature Limiter
- Complaint to IEC Class II protection standards and temperature protection in line with DIN 12880 Class 3.1



Removes fume from the inside of the chamber

Safe surface even at maximum temperature

Convenient Structure and Functions

- Logs the last 12 events, including run times, stops, and errors
- Double stackable with stacking set (option) maximizes space utilization (-05 / -15 models only)
- 「Hands-free™」 door allows both hands free while holding samples

Logs the recent 12 events

Increased space utilization by double stacking (stacking set : option)
(※ When double stacking, the minimum control temperature of the upper chamber may be limited.)

Specification

Model	Solid door (without window)	ON4-03S	ON4-05S	ON4-10S	ON4-15S
	Window door	ON4-03SW	ON4-05SW	ON4-10SW	ON4-15SW
Chamber volume (L / cu ft)		26 / 0.92	58 / 2.05	110 / 3.88	147 / 5.19
Temperature	Range (°C / °F)	Amb.+15 ~ 250°C / Amb.+27 ~ 482°F			
	Fluctuation at 100°C (°C / °F)	±0.4 / ±0.72	±0.5 / ±0.9	±0.5 / ±0.9	±0.5 / ±0.9
	Variation at 100°C (°C / °F)	±2.8 / ±5.04	±2.6 / ±4.68	±3.6 / ±6.48	±3.5 / ±6.3
	Heating time to 100°C (min.)[1]	25	39	22	21
	Recovery time at 100°C (min.)	17	19	10	9
Control panel		3.5 inch TFT Color LCD			
Communication interface		USB-B, RS-232 (option)			
Function	Recently event record	12 ea			
Dimensions	Interior (W x D x H, mm / inch)	273 x 270 x 350 / 10.75 x 10.63 x 13.78	340 x 390 x 422 / 13.4 x 15.35 x 16.61	441 x 420 x 597 / 17.36 x 16.54 x 23.5	500 x 446 x 659 / 19.69 x 17.56 x 25.95
	Exterior (W x D x H, mm / inch)	478 x 527 x 604 / 18.8 x 20.75 x 23.78	558 x 648 x 684 / 21.97 x 25.5 x 26.93	663 x 677 x 859 / 26.1 x 26.65 x 33.82	728 x 704 x 914 / 28.66 x 27.7 x 36.0
	Net weight (kg / lbs)	33 / 72.8	53 / 116.8	63 / 138.9	73 / 160.9
Shelves	Quantity of shelves (standard/max.)	2 / 4	2 / 5	2 / 8	2 / 9
	Max. Load per shelf (kg / lbs)	20 / 44.09			
Number of air change per hour at 100°C		16			
Electrical requirements	230V, 50/60Hz, A	3.2	3.5	5.7	7.4
Cat. No.	**Solid door (without window)**	**AAH15045K**	**AAH15065K**	**AAH15075K**	**AAH15085K**
	Window door	**AAH15145K**	**AAH15165K**	**AAH15175K**	**AAH15185K**
Electrical requirements	120V, 60Hz, A	6	6.7	10.9	14.2
Cat. No.	**Solid door (without window)**	**AAH15046U**	**AAH15066U**	**AAH15076U**	**AAH15086U**
	Window door	**AAH15146U**	**AAH15166U**	**AAH15176U**	**AAH15186U**

1) Heating time is defined as the time taken to reach 98% of the set temperature.
※ Technical data according to DIN 12880

Accessories Page 84

Wire Shelf, Perforated Shelf, Stacking set, BMS Port, LC GreenBox, LC DataKeeper

Accessories for Oven & Furnace

Shelves

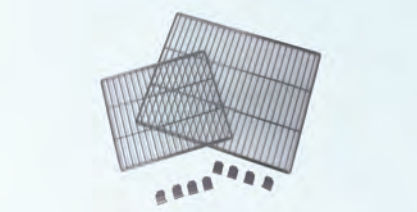

Wire Shelf (Oven)
- Excellent corrosion resistance as made of stainless steel.
- Excellent air permeability and uniform temperature uniformity.

Perforated Shelf (Oven)
- Porous structure made of stainless steel.
- Solid structure makes it suitable for high load samples.

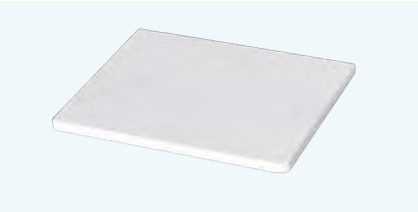

Ceramic Shelf (Furnace)
- Plate for placing a crucible.
- Made of Mullite for thermal resistance.

Shelves for Forced/Natural Convection Oven

Model	Wire shelves		Perforated shelves	
	Cat. No.	Quantity (standard/max.)	Cat. No.	Quantity (max.)
OF4-03P/V/S, OF4-03PW/VW/SW	**00FDA0009739**	2 / 4	**AAA125341**	4
OF4-05P/V/S, OF4-05PW/VW/SW	**00FDA0009738**	2 / 5	**AAA125342**	5
OF4-10P/V/S, OF4-10PW/VW/SW	**00FDA0009737**	2 / 8	**AAA125343**	8
OF4-15P/V/S, OF4-15PW/VW/SW	**00FDA0009736**	2 / 9	**AAA125344**	9
OF3-30/30W/30P/30PW	**00RTD0001196**	2 / 5	**AAA18501**	5
OF3-30H/30HW/30HP/30HPW	**00RTD0001196**	2 / 5	**AAA18501**	5
OF3-45/45W/45P/45PW	**00RTD0001196**	3 / 11	**AAA18501**	8
OF3-45H/45HW/45HP/45HPW	**00RTD0001196**	3 / 11	**AAA18501**	8
OF3-75/75W/75P/75PW	**00RTD0001197**	3 / 11	**AAA18502**	11
OF3-75H/75HW/75HP/75HPW	**00RTD0001197**	3 / 11	**AAA18502**	11
OF-02G-4C	**00EDA0008136**	8 / 16	**AAA12531**	16
ON4-03V/S, ON4-03VW/SW	**00FDA0009739**	2 / 4	**AAA125341**	4
ON4-05V/S, ON4-05VW/SW	**00FDA0009949**	2 / 5	**AAA125362**	5
ON4-10V/S, ON4-10VW/SW	**00FDA0009950**	2 / 8	**AAA125363**	8
ON4-15V/S, ON4-15VW/SW	**00FDA0009951**	2 / 9	**AAA125364**	9

※ Brackets for each shelf are included.

Shelves for Vacuum Oven

Description	Position	Material	Cat. No.	
			OV4-30/30S	OV4-65/65S
Bottom shelf, Basic[2]		Aluminum	**AAA13519**	**AAA13520**
		Stainless Steel	**AAA13529**	**AAA13530**
Extra shelf, Optional[1), 4)]		Aluminum	**AAA13511**	**AAA13513**
		Stainless Steel	**AAA13521**	**AAA13523**
Lower shelf, Basic[2)]		Aluminum	**AAA13517**	**AAA13518**
		Stainless Steel	**AAA13527**	**AAA13528**
Upper shelf, Basic[2), 3)]		Aluminum	**AAA13512**	**AAA13514**
		Stainless Steel	**AAA13522**	**AAA13524**
Multiple shelf, Optional[1), 4)]		Aluminum	**AAA13531**	**AAA13533**
		Stainless Steel	**AAA13532**	**AAA13534**
Shelf spacer, Basic[2)]	Insert where the gap occurs	Aluminum	**AAA13515**	**AAA13516**
		Stainless Steel	**AAA13525**	**AAA13526**

1) You can add an extra shelf or multiple shelf that can be placed at the bottom to experiment with more samples same time, and the value of Variation and Fluctuation may increase slightly.
2) The shelf and shelf spacer are included as bundled accessories, and you can purchase when need to replace them.
3) For OV4-65 models, 2 upper shelves are basic provided.
4) Maximum number of shelf for OV4-30 model : 4 extra shelves / 5 multiple shelves and for OV4-65 model : 4 extra shelves / 8 multiple shelves.

Shelves for Furnace

Model	Dimension (W x D x H, mm)	Ceramic Shelf
MF2-12 series	120 x 230 x 12t	**00FDA0009706**
MF2-22 series	140 x 280 x 12t	**00FDA0009707**
MF2-32 series	260 x 260 x 12t	**00FDA0009708**

Recorders & Brackets

Recorder (Dot)
- 6-channel graph-type temperature recorder.
- Adjustable recording range, speed, etc.

Recorder (Thermal Line)
- Graph/Digital mode.
- Thermal-type temperature recorder.

Stacking Set (-05 / -15 models only)
- Double stackable
- Firm stacking allows efficient utilization of space (※ When double stacking, the minimum control temperature of the upper chamber may be limited.)

Model	Description	Cat. No.
OF3-30/45/75/30H/45H/75H Series	Recorder (Dot)	AAA8T500
	Recorder (Thermal line)	AAAE1503
MF2 series	Recorder (Thermal line)	AAAE1503
OF4/ON4-05	Stacking set	AAA125547
OF4/ON4-15	Stacking set	AAA125549

Door Gaskets for Vacuum Oven

Description		Cat. No.	
		OV4-30/30S	OV4-65/65S
Silicone Gasket	Included as standard. Silicon gasket for sealing the door.	00FDA0009912	00FDA0009913
Viton Gasket	High chemical resistance	00FDA0009914	00FDA0009915

Communication

BMS Port
- Real-time monitoring at a central monitoring facility.
- Easier to ensure safety, especially in labs where multiple units are operated.

Communication Port
- Control PC connection and data by dedicated software.
- Included as default in OF4-P/V and optional for OF4-S.

LC GreenBox
(Mobile Monitoring System)
- Remote monitoring and control via mobile application.
- One LC GreenBox can connect up to 4 devices.
- Connect using RS-232 port on the communication port.



LC DataKeeper
- High-integrity software compliant with FDA 21 CFR Part 11
- Integrated with Jeio Tech equipment to undergo GMP audits

Ports	OF4-P/V, ON4-P/V	OF4-S, ON4-S	OV4
BMS Port	AAA125534		AAA125558
Communication Port[1]	Standard	AAA125533	-
LC GreenBox	AAHQ1011K		
LC DataKeeper Basic[2]	SSA11001		
LC DataKeeper Pro[2]	SSA11002		

1) Communication port is provided as a standard in advanced (-V) model and is an optional add-on for the basic (-S) model for connecting LC DataKeeper, LC GreenBox, BMS, and PC.
2) Trial version is available for 30 days, offering the same features as the Basic version, and can be requested through the website.